

**ANNUAL INSPECTION REPORT**  
**ASH LANDFILL AREA**  
**SPRINGERVILLE GENERATING STATION**  
**SPRINGERVILLE, ARIZONA**

Prepared for  
Tucson Electric Power Company

January 18, 2019

Prepared by  
AMTECH Associates, L.L.C.  
8666 E. San Alberto Drive  
Scottsdale, Arizona 85258

Project No. 1004.06




**Annual Inspection Report  
Ash Landfill Area  
Springerville Generating Station  
Springerville, Arizona**

The material and data in this report were prepared under the supervision and direction of the undersigned. This Report has been prepared to comply with the requirements as specified in CFR §257.84(b).

**AMTECH Associates, L.L.C.**



Tamara M. Jim, Engineer



Syed S. Amanatullah, P.E.  
Managing Member

## CONTENTS

---

<b>1</b>	<b>ANNUAL INSPECTION REPORT .....</b>	<b>1</b>
1.1	<i>Introduction.....</i>	<i>1</i>
1.1.1	Site Description and Location.....	1
1.2	<i>Regulatory Requirements .....</i>	<i>2</i>
1.2.1	Document Review §257.84(b)(i) .....	2
1.2.1.1	Regulatory Documents.....	2
1.2.1.2	Weekly Inspections §257.84(a).....	3
1.2.1.3	Previous Annual Inspection Report .....	3
1.2.2	Visual Inspection of CCR Unit §257.84(b)(ii).....	4
1.2.2.1	Changes in Geometry §257.84(b)(2)(i).....	4
1.2.2.2	Approximate Volume §257.84(b)(2)(ii).....	4
1.2.2.3	Structural Evaluation §257.84(b)(2)(iii) .....	4
1.2.2.4	Any Other Changes §257.84(b)(2)(iv).....	4
1.2.2.5	Other Comments .....	4
1.3	<i>Conclusion .....</i>	<i>5</i>

## FIGURE

Figure 1 – Location and Site Map

## APPENDICES

Appendix A – Site Photographs

# 1 ANNUAL INSPECTION REPORT

---

## 1.1 Introduction

AMTECH Associates L.L.C. (AMTECH) has prepared this 2018 Annual Inspection Report for the Ash Landfill area associated with Tucson Electric Power's Springerville Generating Station (SGS) approximately 15 miles north of Springerville, Arizona (See **Figure 1**). This report was prepared to comply with annual inspection requirements as per the U.S. Environmental Protection Agency's Disposal of Coal Combustion Residuals (CCR) from Electric Utilities, CFR Part 257 Subpart D. These standards are applicable to the facility's Ash Landfill as an "Existing CCR landfill" as defined in CFR §257.53.

In accordance with §257.105(g)(9), this report will be placed in the SGS's facility operating record. Also in accordance with §257.106(g)(7), this report will be noticed to the State Director and will be posted to the publicly accessible internet site in accordance with §257.107(g)(7).

### 1.1.1 Site Description and Location

The SGS is a four-unit, pulverized coal-fired, steam electric generating facility, operated by Tucson Electric Power Company (TEP), that began operations in 1985 and consists of a combined net generating output of approximately 1600-megawatts.

SGS is located approximately 15 miles northeast of Springerville, in Apache County, Arizona. The power plant area of SGS is located in Sections 27, 28, 33, and 34, of Township 11 North, Range 30 East of the Salt and Gila River Baseline and Meridian. The SGS site occupies 14,355 acres, which includes the power plant area, ash landfill area and the east and west well fields.

The Ash Landfill, located southwest of the power plant area, is primarily used for the disposal of fly and bottom ash, products of the coal-fired units at the plant. The ash, which is dry, is mixed with water in the ash unloading facility for dust control. The ash is then loaded into haul trucks for transfer to the Ash Landfill.

A delineated portion of the Ash Landfill is used for the disposal of other items in lesser quantities, i.e. reactivator sludge, construction debris and power plant outage refuse, sump sludge's, demineralizer resins, PCS, cooling tower sludge, lime, soda ash, sewage pond sludge, evaporation pond solids, miscellaneous pond clean-outs, cooling tower treated lumber, and other inert and non-hazardous materials. A site map showing the locations of the power plant area and ash landfill area is presented in **Figure 1**, Attached.

## 1.2 Regulatory Requirements

As per CFR Part §257.84(b)(1), an existing CCR landfill must be inspected on a periodic basis by a Qualified Professional Engineer to ensure that the design, construction, operation, and maintenance of the CCR unit is consistent with recognized and generally accepted good engineering standards. The inspection must, at a minimum include: (i) a review of available information regarding the status and condition of the CCR unit, including but not limited to, files available in the operating record; (ii) visual inspection of the CCR unit to identify signs of distress or malfunction of the CCR unit.

### 1.2.1 Document Review §257.84(b)(i)

#### 1.2.1.1 Regulatory Documents

A *Fugitive Dust Control Plan*, per the CCR requirements, was developed for the Ash Landfill by CB&I Environmental & Infrastructure, Inc. in September 2015. The Fugitive Dust Control Plan contains a description of fugitive dust sources and operating measures to effectively minimize fugitive dust emissions from the CCR facility.

An *Initial Run-on/Run-off Control System Plan* for managing stormwater at the Ash Landfill, per the CCR requirements, was developed for the Ash Landfill by AMTECH in October 2016, based on the Drainage Study by TetraTech Inc. The Initial Run-on/Run-off Control System Plan contains a description of the design, operation, and maintenance of a run-on control system to prevent flow onto the active portion of the CCR facility during the peak discharge from a 24-hour, 25-year storm; and a run-off control system from the active portion of the CCR facility to collect and control at least the water volume resulting from a 24-hour, 25-year storm. In addition, as per §257.81(b), run-off from the active portion of the CCR unit must be handled in accordance with the surface water requirements under §257.3-3.

A *Closure Plan* for the Ash Landfill, per the CCR requirements, was developed for the Ash Landfill by AMTECH in October 2016 using TEP's conceptual closure configuration. The Closure Plan outlines the procedures to be taken in order to close the Ash Landfill as per the CCR requirements in §257.102(b).

A *Post Closure Plan* for the Ash Landfill, per the CCR requirements, was developed for the Ash Landfill by AMTECH in October 2016. The Post Closure Plan outlines the procedures to be taken in order to perform post-closure activities at the Ash Landfill as per the CCR requirements in §257.104.

A *Groundwater Monitoring System Certification* report, per the CCR requirements, was developed for the Ash Landfill by AMTECH in October 2017. The Groundwater Monitoring System Certification report certifies that the groundwater monitoring system installed at the Ash Landfill meets the CCR requirements of 40 CFR §257.91.

A *Statistical Method Certification* report, per the CCR requirements, was developed for the Ash Landfill by AMTECH in October 2017. The Statistical Method Certification report

certifies that the selected statistical method is appropriate for evaluating the groundwater monitoring data for the Ash Landfill and meets the CCR requirements of 40 CFR §257.93(f).

An *Unstable Areas Demonstration* report for the Ash Landfill, per the CCR requirements, was developed for the Ash Landfill by AMTECH in October 2018. This report was prepared to show that the Ash Landfill is in compliance with the unstable areas demonstration requirements as per the CCR regulations in 40 CFR §257.64.

#### 1.2.1.2 Weekly Inspections §257.84(a)

Weekly inspections by a qualified person have been conducted at the Ash Landfill area and recorded in the facility operating record as required in §257.84. As per §257.84 (a)(i), the weekly inspections were conducted to examine the CCR facility for any appearances of actual or potential structural weakness and other conditions which are disrupting or have the potential to disrupt the operation or safety of the CCR facility.

AMTECH reviewed the weekly inspection records, provided by TEP, dated January 1, 2018 through December 31, 2018. Based on the weekly inspection reports, AMTECH observed that the following inspection items have met all expectations and no comments/recommendations have been recorded.

- Run-on, Run-off Controls;
- Water Retention Structure;
- Fugitive Dust Controls on Roadways and Landfill;
- Structural Stability of Landfill; and
- No Work Orders were generated from the routine inspections.

#### 1.2.1.3 Previous Annual Inspection Report

AMTECH conducted the previous site inspection at the Ash Landfill on January 11, 2018 and summarized the findings in the 2017 Annual Report, dated January 18, 2018. The 2017 Annual Report contained the following observations for the Ash Landfill:

- The landfill geometry consisted of approximate 8-foot ash/waste material lifts with benches that slope inwards towards the toe of the landfill slopes.
- The CCR volume in the landfill is at 29.71 million tons, based on the TEP's haul truck logs during 2017.
- No obvious signs of actual or potential structural weakness were observed.
- The landfill's grading and drainage system prevents off-site surface water from entering the landfill area and stormwater run-off from the bottom benches and active areas of the landfill are routed to the stormwater runoff detention basin.

- Fugitive dust was controlled as described in the *Fugitive Dust Control Plan*.
- A soil cover exists over most of the inactive areas of the landfill that is at least 2 feet in thickness.

## **1.2.2 Visual Inspection of CCR Unit §257.84(b)(ii)**

AMTECH conducted a visual site inspection at the SGS Ash Landfill area on January 3, 2019. Observations made during the site inspection are summarized below.

### **1.2.2.1 Changes in Geometry §257.84(b)(2)(i)**

The current geometry of the landfill consists of approximate 8-foot ash/waste material lifts with benches that slope inwards towards the toe of the landfill slopes. Since the previous annual inspection, the working face of 8-foot ash/waste lifts continued to be built out towards the west. In addition, ash/waste material was placed in the west end of the Ash Landfill to continue the creation of a keyway to anchor and provide a stabilized area for future deposition of ash/waste from the current working face to the west end.

### **1.2.2.2 Approximate Volume §257.84(b)(2)(ii)**

Based on the 2018 haul truck logs provided by TEP (1.06 million tons), the total approximate volume of CCR disposed of in the Ash Landfill area is now at 30.77 million tons.

### **1.2.2.3 Structural Evaluation §257.84(b)(2)(iii)**

AMTECH did not observe any obvious signs of actual or potential structural weakness within the Ash Landfill.

### **1.2.2.4 Any Other Changes §257.84(b)(2)(iv)**

No changes for 2018.

### **1.2.2.5 Other Comments**

The landfill inspection verified that the landfill's grading and drainage system prevents surface water from surrounding areas from entering the landfill and that stormwater run-off from the bottom benches and active areas of the landfill are routed to the stormwater runoff detention basin, located northwest of the Ash Landfill. TEP continues to perform grading operations as needed to address any minor erosion in the areas where final cover soil has been applied, perimeter drainage channels, perimeter soil berms, and haul roads.

The Ash Landfill is operated in accordance with its existing permits and approved plans and specifications.

Fugitive dust is effectively controlled as described in the *Fugitive Dust Control Plan*, dated September 2015.

TEP applied a soil cover over most of the inactive areas of the landfill that is at least 2 feet in thickness. This soil cover experienced some natural vegetation that will assist in erosion control.


Site photographs of the Ash Landfill are presented in **Appendix A**.

### **1.3 Conclusion**

Based on AMTECH's review of the facility's regulatory documents, inspection records, and observations noted during the site visit, TEP is in compliance with all the design, construction, operation, and maintenance of the relevant CCR unit (Ash Landfill area) and is consistent with recognized and generally accepted good engineering standards.



**FIGURE**  
**Location and Site Map**

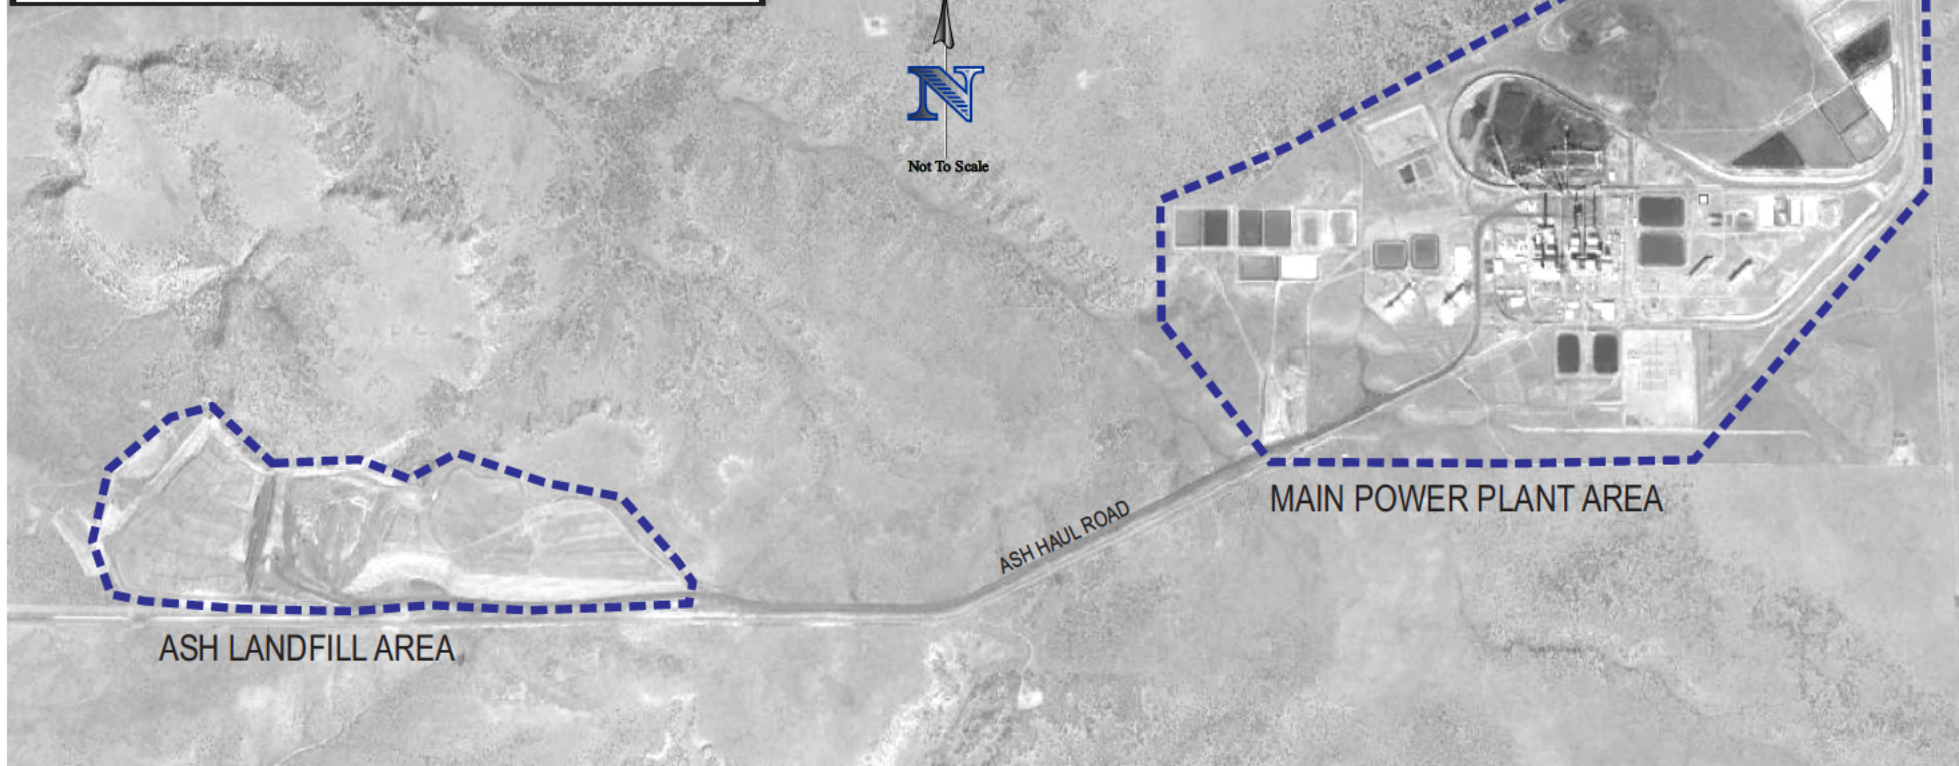


# **APPENDIX A**

## **Site Photographs**



**PHOTOGRAPH 1.**

South slope of the Ash Landfill showing ash/waste benches. View looking from South to North.

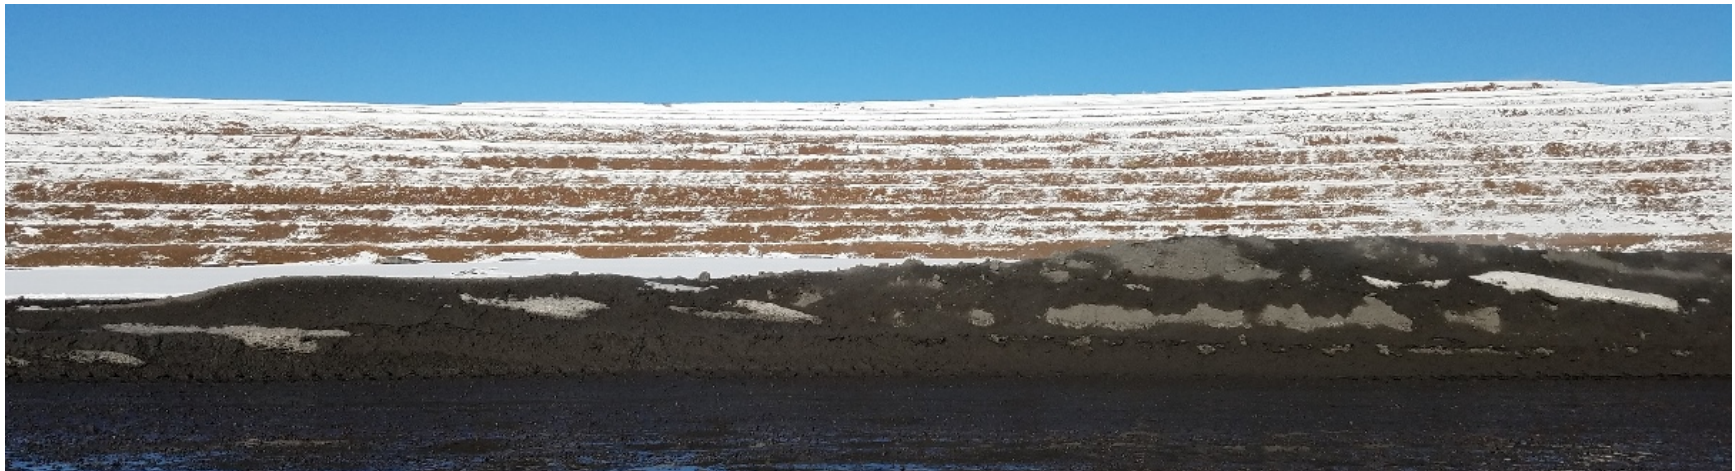

**PHOTOGRAPH 2.**

South slope of the Ash Landfill. View looking South to North.